

(3~6pm, Monday 21 June 2004. You may answer the questions either in Korean or English, or both.)

학과		학번		성명	
----	--	----	--	----	--

A focused SAR image has the signal $\hat{g} = \exp[-j4\pi R/\lambda]$, where R is the distance between the sensor and the target and λ is the wavelength of the transmitted microwave.

1. What is the phase of the above signal (5P)?
2. Describe the physical meaning of the phase in the focused SAR signal (5P).

Consider an interferometric SAR configuration as shown in the figure far below (next page).

3. Describe the phase difference between two SAR observations (interferometric phase), $\phi = \phi_2 - \phi_1$, in terms of R_1 , R_2 , B , θ_1 , and β , from $\Delta S_1 P S_2$. (10P)

4. Show that the interferometric phase can be reduced to $\phi = \frac{4\pi}{\lambda} B \sin(\theta_1 - \beta)$. You need to know that R is several hundred kilometers while the baseline B is no more than several hundred meters. As the ratio B/R is very small, you can drop $(B/R)^2$ term during the derivation. Also you need to know that $\sqrt{1 \pm x} \approx 1 \pm \frac{1}{2}x$ when x is very small. (10P)

5. Prove that $\phi = \frac{4\pi}{\lambda} B_{\parallel}$, where B_{\parallel} the component of the baseline parallel to the radar look direction. (5P)

6. Describe the elevation z of the target P , in terms of H , R_1 , and θ_1 . (10P)

7. Starting from the equations in question 4 and 6, show that the height sensitivity of the interferogram is $\frac{\partial \phi}{\partial z} = \frac{\partial \phi}{\partial \theta} \frac{\partial \theta}{\partial z} = \frac{4\pi B_{\perp}}{\lambda R_1 \sin \theta_1}$, where B_{\perp} is the component of the baseline perpendicular to the radar look direction. (10P)

8. Given the phase measurement accuracy of the SAR system is $\delta\phi_{sys}$, find the condition of B_{\perp} to make the height resolution δz better than the required height resolution δz_{req} , i.e.,


$$\delta z = \frac{\partial z}{\partial \phi} \delta \phi_{sys} < \delta z_{req}. \quad (10P)$$

9. Starting from the equations in question 4 and 6, find the interferometric phase fringe number,

i.e., the number of 2π phase fringe in slant range is

$$k_\phi = \frac{1}{2\pi} \frac{\partial \phi}{\partial R_1} = \frac{1}{2\pi} \frac{\partial \phi}{\partial \theta} \frac{\partial \theta}{\partial R_1} \approx \frac{2B_\perp}{\lambda R_1 \tan \theta_1} \quad [\text{m}^{-1}]. \quad (10\text{P})$$

10. Given the condition that the interferometric phase fringe number should not exceed one fringe over a slant range resolution δR , i.e., $k_\phi < \frac{1}{\delta R}$, limit the B_\perp to meet this criterion. (10P)
11. Combining the limiting conditions of B_\perp obtained from questions 8 and 10, describe the workable B_\perp of an InSAR system. Note there are more limiting conditions of B_\perp than those shown here. (10P)
12. In which situation you'd happen to be to boast your knowledge of SAR system? (5P)

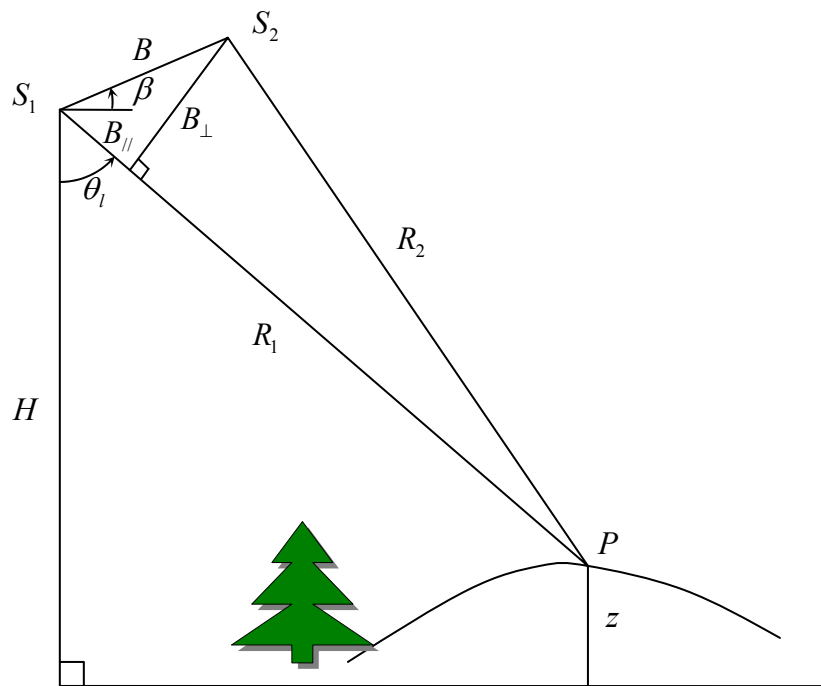

Thank you so much.



Can you join us for the dinner tonight? (Y/N)